
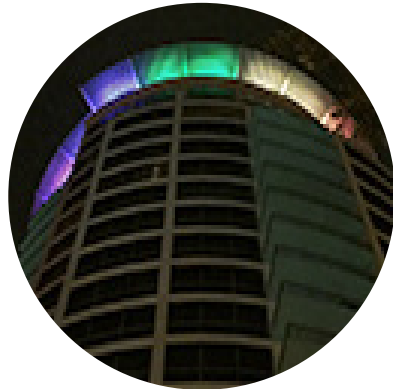


# IL-MEGA

## LED WALL WASH FIXTURE

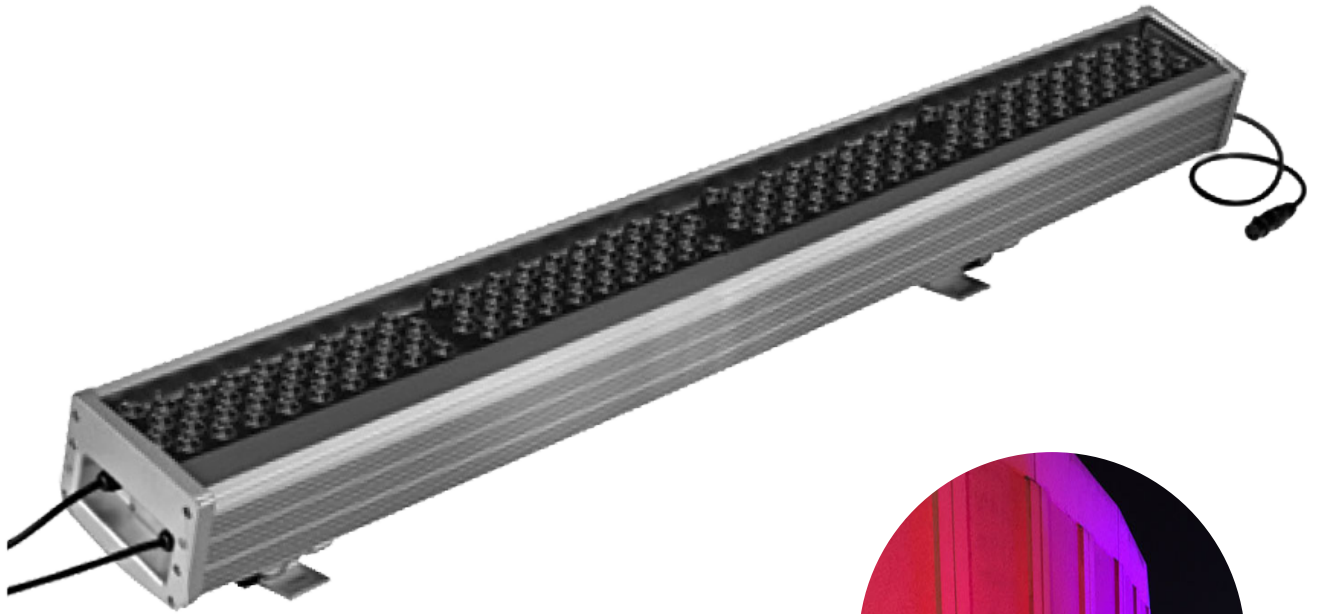


PROJECT	DATE
TYPE	QTY

# IL-MEGA-RGB-150


## RGB LED WALL WASH FIXTURE



**IL-MEGA-RGB/40/90/170-36P**

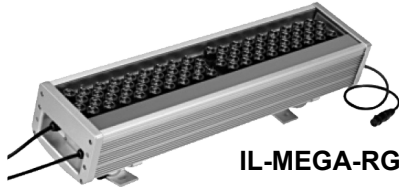

**IL-MEGA-RGB/40/90/170-72P**

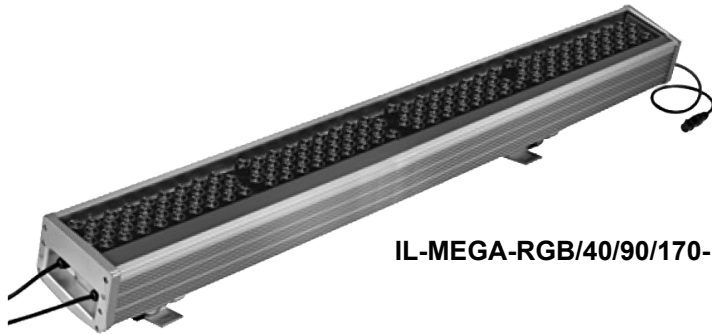

**IL-MEGA-RGB/40/90/170-144P**

### DESCRIPTION:



The **IL-MEGA-RGB-150** LED Light Source is a multi-controllable and configurable wall washer for the architectural and commercial lighting markets. It can work in independent mode with built in programs for single steady color or DMX mode for various color and light changing effects or master/slave mode for automation and synchronization. *(IL-MEGA is single color without DMX control)*

### SPECIFICATIONS

Materials	Aluminum Alloy / 6063
Rotary Angle	150°
Input Voltage	120/240V AC
Operating Voltage	24V DC
Rating	IP65
Operating Temp.	-20° C – 40° C

### PHOTOMETRICS *(more on page 5)*

D-1. Cadela Distribution

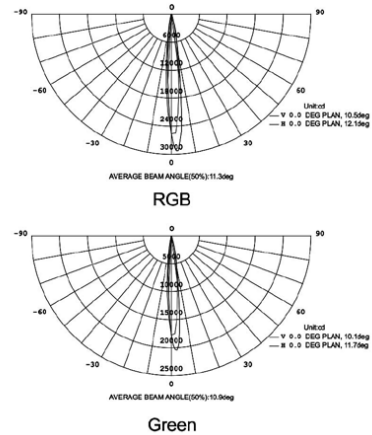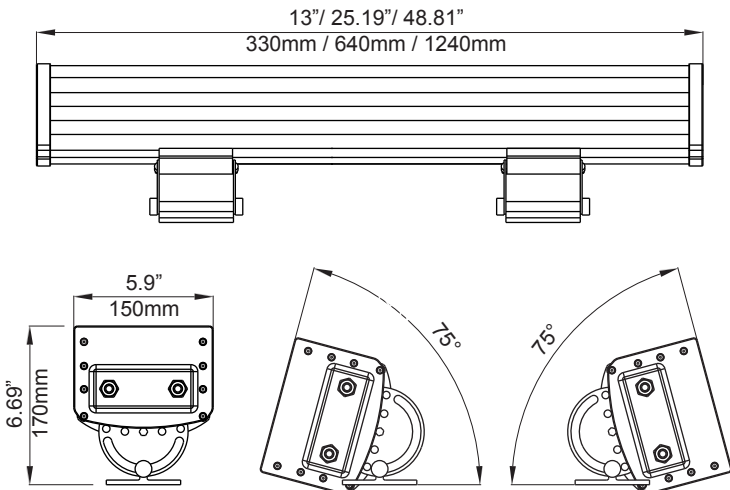

MODEL NO.	LED COLOR	LED QTY.	POWER	BEAM ANGLE	SIZE	WEIGHT	✓
<b>IL-MEGA-RGB-150-36P</b>	Warm White	36	40 Watts	10° / 20° / 45° / 15x50°	L13", W5.9", H6.7"	11 lb	
<b>IL-MEGA-RGB-150-72P</b>	Warm White	72	90 Watts	10° / 20° / 45° / 15x50°	L25.19", W5.9", H6.7"	18.73lb	
<b>IL-MEGA-RGB-150-144P</b>	Warm White	144	170 Watts	10° / 20° / 45° / 15x50°	L48.8", W5.9", H6.7"	33lb	

### IMPACT LIGHTING

2101 West Central Blvd. Orlando, Florida 32805 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com


[www.impactlightinginc.com](http://www.impactlightinginc.com)

PROJECT	DATE
TYPE	QTY


**WARM WHITE LED WALL WASH FIXTURE**



**IL-MEGA-WW-150/40/90/170-36P**

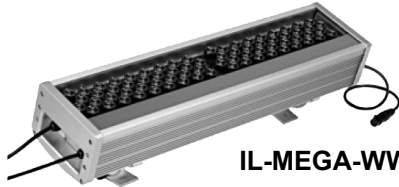

**IL-MEGA-WW-150/40/90/170-72P**

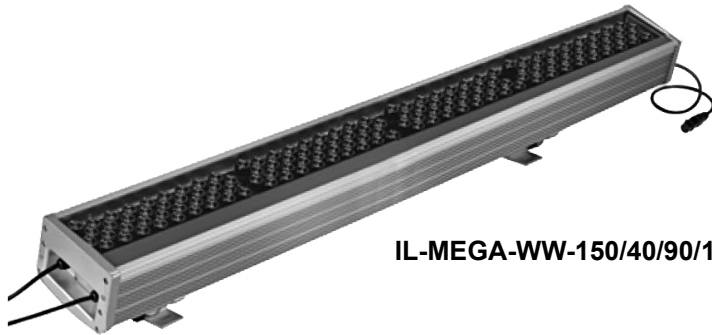

**IL-MEGA-WW-150/40/90/170-144P**

**DESCRIPTION:**



The **IL-MEGA-WW-150** LED Light Source is a multi-controllable and configurable wall washer for the architectural and commercial lighting markets. It can work in independent mode with built in programs for single steady color or DMX mode for various color and light changing effects or master/slave mode for automation and synchronization. *(IL-MEGA is single color without DMX control)*

**SPECIFICATIONS**

Materials	Aluminum Alloy / 6063
Rotary Angle	150°
Input Voltage	120/240V AC
Operating Voltage	24V DC
Rating	IP65
Operating Temp.	-20° C – 40° C

**PHOTOMETRICS** *(more on page 5)*

D-1. Cadela Distribution

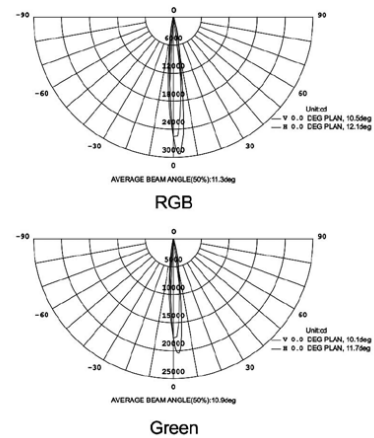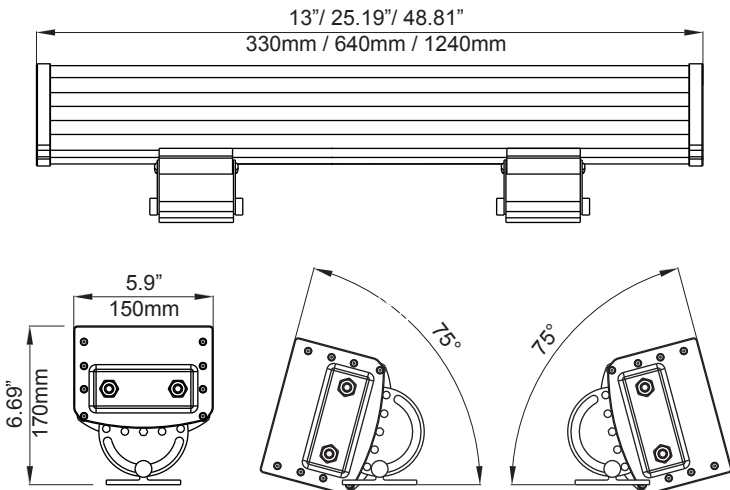

MODEL NO.	LED COLOR	LED QTY.	POWER	BEAM ANGLE	SIZE	WEIGHT	✓
IL-MEGA-WW-150-36P	Warm White	36	40 Watts	10° / 20° / 45° / 15x50°	L13", W5.9", H6.7"	11 lb	
IL-MEGA-WW-150-72P	Warm White	72	90 Watts	10° / 20° / 45° / 15x50°	L25.19", W5.9", H6.7"	18.73lb	
IL-MEGA-WW-150-144P	Warm White	144	170 Watts	10° / 20° / 45° / 15x50°	L48.8", W5.9", H6.7"	33lb	

**IMPACT LIGHTING**

2101 West Central Blvd. Orlando, Florida 32805 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com


[www.impactlightinginc.com](http://www.impactlightinginc.com)

PROJECT	DATE
TYPE	QTY


**COOL WHITE LED WALL WASH FIXTURE**



**IL-MEGA-CW-150/40/90/170-36P**

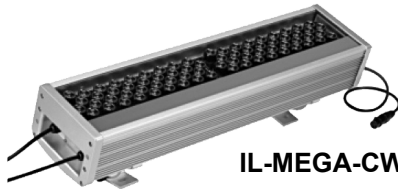

**IL-MEGA-CW-150/40/90/170-72P**

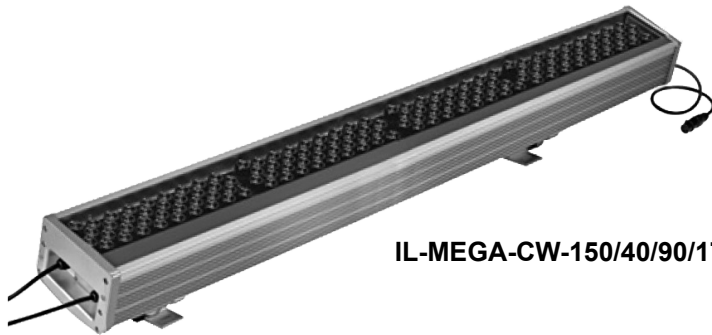

**IL-MEGA-CW-150/40/90/170-144P**

**DESCRIPTION:**



The **IL-MEGA-CW-150** LED Light Source is a multi-controllable and configurable wall washer for the architectural and commercial lighting markets. It can work in independent mode with built in programs for single steady color or DMX mode for various color and light changing effects or master/slave mode for automation and synchronization. *(IL-MEGA is single color without DMX control)*

**SPECIFICATIONS**

Materials	Aluminum Alloy / 6063
Rotary Angle	150°
Input Voltage	120/240V AC
Operating Voltage	24V DC
Rating	IP65
Operating Temp.	-20° C – 40° C

**PHOTOMETRICS** *(more on page 5)*

D-1. Cadela Distribution

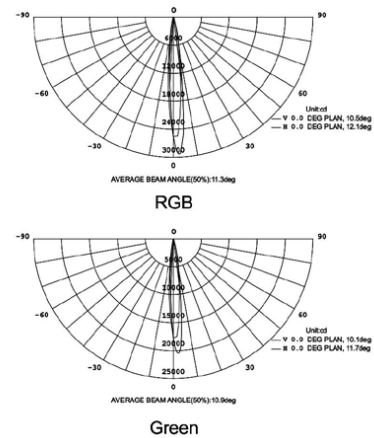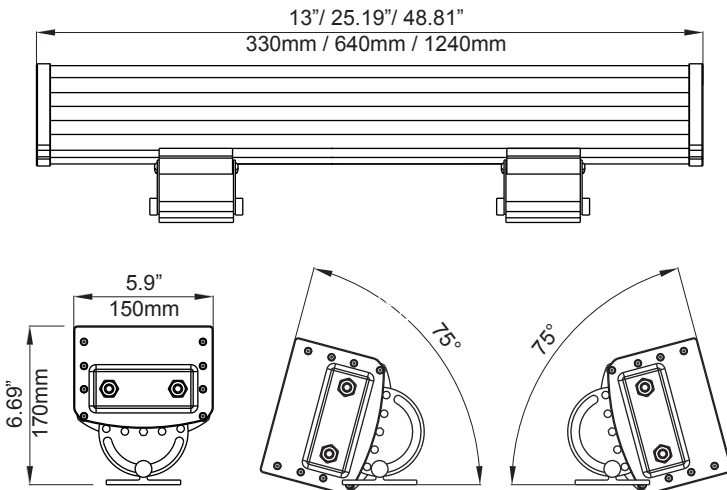

MODEL NO.	LED COLOR	LED QTY.	POWER	BEAM ANGLE	SIZE	WEIGHT	✓
<b>IL-MEGA-CW150-36P</b>	Cool White	36	40 Watts	10° / 20° / 45° / 15x50°	L13", W5.9", H6.7"	11 lb	
<b>IL-MEGA-CW150-72P</b>	Cool White	72	90 Watts	10° / 20° / 45° / 15x50°	L25.19", W5.9", H6.7"	18.73lb	
<b>IL-MEGA-CW150-144P</b>	Cool White	144	170 Watts	10° / 20° / 45° / 15x50°	L48.8", W5.9", H6.7"	33lb	

**IMPACT LIGHTING**

2101 West Central Blvd. Orlando, Florida 32805 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com

[www.impactlightinginc.com](http://www.impactlightinginc.com)


PROJECT	DATE
TYPE	QTY

# IL-MEGA-RGBW-150


## RGB LED WALL WASH FIXTURE



**IL-MEGA-RGBW/40/90/170-36P**

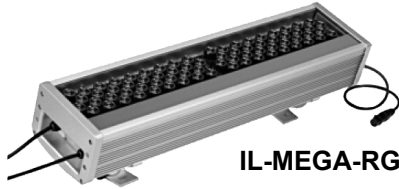

**IL-MEGA-RGBW/40/90/170-72P**

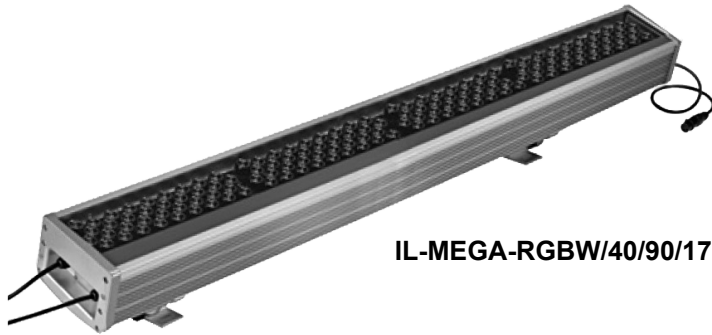

**IL-MEGA-RGBW/40/90/170-144P**

### DESCRIPTION:



The **IL-MEGA-RGBW-150** LED Light Source is a multi-controllable and configurable wall washer for the architectural and commercial lighting markets. It can work in independent mode with built in programs for single steady color or DMX mode for various color and light changing effects or master/slave mode for automation and synchronization. *(IL-MEGA is single color without DMX control)*

### SPECIFICATIONS

Materials	Aluminum Alloy / 6063
Rotary Angle	150°
Input Voltage	120/240V AC
Operating Voltage	24V DC
Rating	IP65
Operating Temp.	-20° C – 40° C

### PHOTOMETRICS *(more on page 5)*

D-1. Cadela Distribution

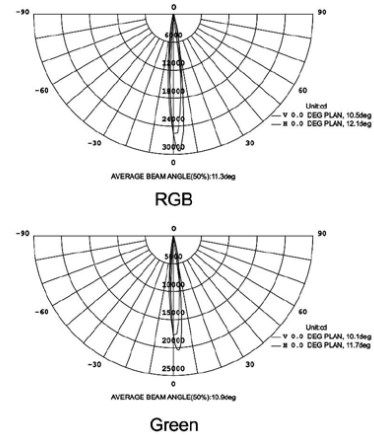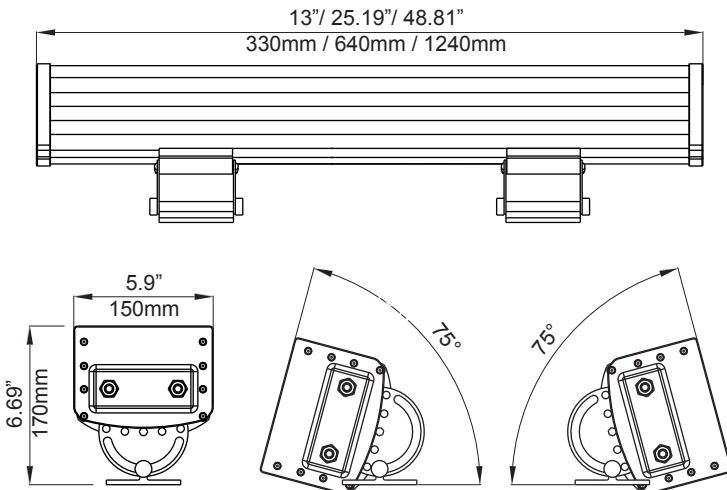

MODEL NO.	LED COLOR	LED QTY.	POWER	BEAM ANGLE	SIZE	WEIGHT	✓
IL-MEGA-RGBW-150-36P	RGBW	36	40 Watts	10° / 20° / 45° / 15x50°	L13", W5.9", H6.7"	11 lb	
IL-MEGA-RGBW-150-72P	RGBW	72	90 Watts	10° / 20° / 45° / 15x50°	L25.19", W5.9", H6.7"	18.73lb	
IL-MEGA-RGBW-150-144P	RGBW	144	170 Watts	10° / 20° / 45° / 15x50°	L48.8", W5.9", H6.7"	33lb	

### IMPACT LIGHTING

2101 West Central Blvd. Orlando, Florida 32805 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com

[www.impactlightinginc.com](http://www.impactlightinginc.com)