

# CONTROLLERS DMX

## THE AURORA 2 ARCHITECTURAL CONTROLLER


The AURORA 2 is one of our most exciting developments within the architectural market. The controller comes pre loaded with RGB effects and can be programmed with the Easy Stand Alone software.



190


### THE UNIT FEATURES:

- DMX512 Stand Alone Controller with a glass face
- 3 touch sensitive buttons for simplicity and reliability
- Dynamic scenes created step by step with adjustable timing
- Live setting of the intensity and color of a scene
- Programmable with the included USB cable and control software
- 5pin connector block at the rear : 3xDMX 2xpower
- Works with 5-12V AC/DC adapter (optional)
- 128 DMX channels
- Dimensions: 86x86mm, only 10mm thick

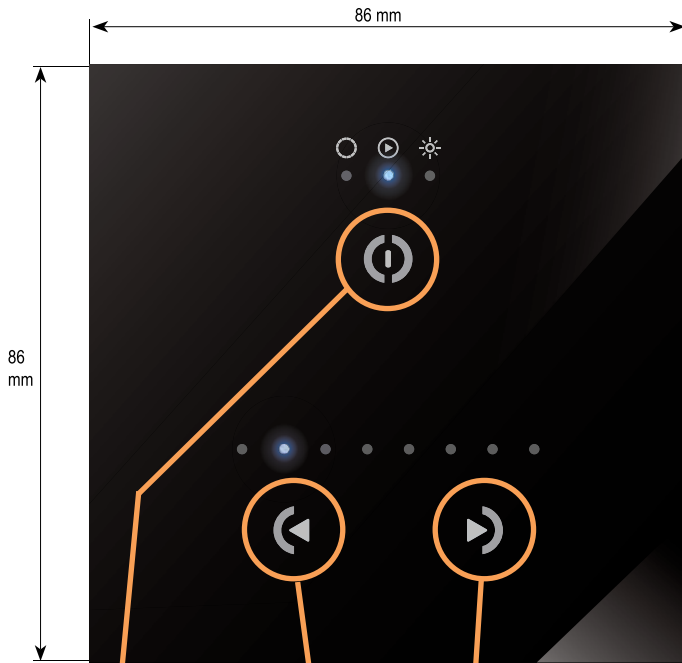

**PREVIOUS**   **NEXT**  
**IL-DMX-AURORA 2**

- **ON/OFF** : Short touch - Easy switch on and off
- **CHANGE MODE** : Touch and hold  
To switch between color, scene and dimmer mode

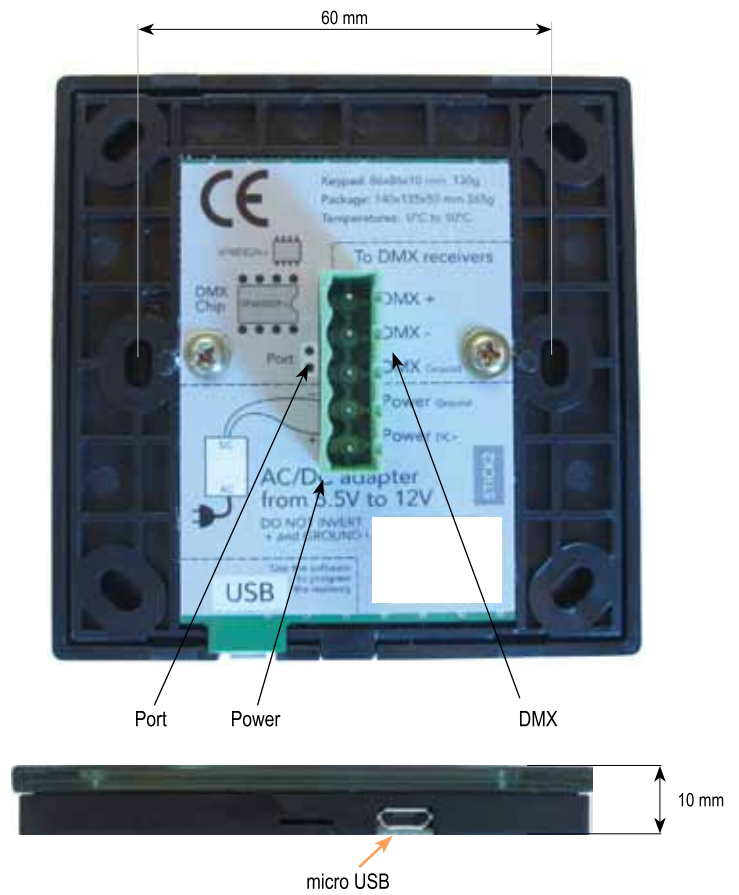

## SPECIFICATIONS

## AVAILABLE MEMORY

SPECIFICATIONS		AVAILABLE MEMORY	
<b>Package</b>	Controller, cdrom, usb cable, connector block	<b>CHANNELS</b>	<b>STEPS</b>
<b>PC requirement</b>	Windows XP/VISTA/SEVEN 32/64 bits and USB 2.0 (MAC OSx soon)	<b>8</b>	326
<b>Software</b>	Easy Stand Alone, (ESA2 mac/pc scheduled for September 2011)	<b>16</b>	192
<b>Versions</b>	Black (AURORA-GU2-BD1) White (AURORA-GU2-WD1)	<b>32</b>	102
<b>Connections</b>	Power (2pins) DMX (3pins) Port (2 pins) Micro-usb	<b>48</b>	68
<b>Power</b>	from 5.5V to 18V DC (AC/DC adapter in option)	<b>64</b>	50
<b>Certifications</b>	EC, EMC, ROHS, ETL, UL (some are in process)	<b>80</b>	38
<b>Keypad</b>	86x86x10 mm 130g	<b>96</b>	31
<b>Package</b>	140x135x50 mm 365g	<b>112</b>	25
<b>Use</b>	Environement IP20 Temperature 0°C to 50°C	<b>128</b>	21