


PROJECT	DATE
TYPE	QTY

Micro Series Micro-Flex

IP67 Micro Flexible LED Neon



DESCRIPTION:


Impact Lighting's MICRO-FLEX LED Neon™ can be viewed is a no spot flexible LED Strip in a white PVC jacket.

Perfect for applications such as shelf lighting, architectural accent lighting, glass or acrylic backlighting, showroom and exhibition displays, and much more. The water resistant MICRO-FLEX LED Neon is dimmable.

FEATURES:


- No Visable LED Spots
- 160° View Angle
- · Ultra Bright Surface Mount LED's
- CRI 90 or Better
- No RF Interference
- Flexible LED Strip Light on Vertical Axis
- Available in Warm White, Neutral White, Cool White
- · Water Resistant IP67

SPECIFICATIONS

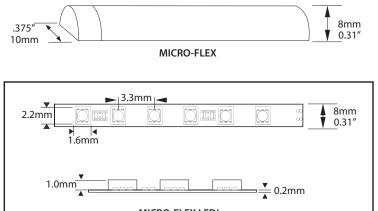

MICRO-FLEX LED's

MODEL	IL-MICRO-FLEX
Reel Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watts Per Meter	12 Watts per Meter
Light Source	300 pcs/Meter (39.37") 2216 SMD LED
Dimensions	5000(L) x 10(W) x 8(H)mm (16.4' x 0.39" x 0.31")
Max Length	5 Meters (16.4 Feet)
View Angle	160°
Brightness	200~250 LM/ft (30.48cm)
Color Temperature	Very Warm White, Warm White, Neutral White, Cool White
Lamp Life	30,000 hours (average life)
IP Rating	IP67 (Water Resistant)
Mount	Optional 13mm PVC Channel or included Clips
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)



ORDERING Example: IL-MICRO-FLEX-NW Micro Flex Led Neon with Neutral White LED (shown in image above)

MODEL	LED
MICRO-FLEX	-
Micro Flex LED Neon Series 5M Reel (16.4 Ft.)	VWW - Very Warm White (2200-2400K) WW - Warm White (2500-2600K) NW - Neutral White (3400-3500K) CW - Cool White (5000-5200K)

IMPACT LIGHTING

2101 West Central Blvd. Orlando, Florida 32805 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com www.impactlightinginc.com